



**RF360**  
**Europe GmbH**

## **SAW components**

### **SAW duplexer**

Automotive telematics  
LTE band 3

Series/type:	B4421
Ordering code:	B39182B4421P810
Date:	February 26, 2018
Version:	2.2

RF360 products mentioned within this document are products of RF360 Europe GmbH and other subsidiaries of RF360 Holdings Singapore Pte. Ltd. (collectively, the "RF360 Subsidiaries").

RF360 Europe GmbH, Anzinger Str. 13, München, Germany

© 2019 RF360 Europe GmbH and/or its affiliated companies. All rights reserved.


These materials, including the information contained herein, may be used only for informational purposes by the customer. The RF360 Subsidiaries assume no responsibility for errors or omissions in these materials or the information contained herein. The RF360 Subsidiaries reserve the right to make changes to the product(s) or information contained herein without notice. The materials and information are provided on an AS IS basis, and the RF360 Subsidiaries assume no liability and make no warranty or representation, either expressed or implied, with respect to the materials, or any output or results based on the use, application, or evaluation of such materials, including, without limitation, with respect to the non-infringement of trademarks, patents, copyrights or any other intellectual property rights or other rights of third parties.

No use of this documentation or any information contained herein grants any license, whether express, implied, by estoppel or otherwise, to any intellectual property rights, including, without limitation, to any patents owned by QUALCOMM Incorporated or any of its subsidiaries.

Not to be used, copied, reproduced, or modified in whole or in part, nor its contents revealed in any manner to others without the express written permission of RF360 Europe GmbH.

Qualcomm is a trademark of Qualcomm Incorporated, registered in the United States and other countries. Other product and brand names may be trademarks or registered trademarks of their respective owners.

This technical data may be subject to U.S. and international export, re-export, or transfer ("export") laws. Diversion contrary to U.S. and international law is strictly prohibited.

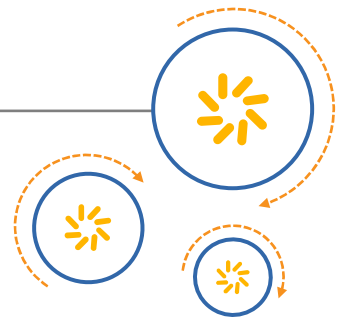

RF360 Europe GmbH  
A Qualcomm – TDK Joint Venture

## SAW components

### SAW duplexer

Automotive telematics  
LTE band 3

Series/type:	B4421
Ordering code:	B39182B4421P810
Date:	February 26, 2018
Version:	2.2

RF360 products mentioned within this document are offered by RF360 Europe GmbH and other subsidiaries of RF360 Holdings Singapore Pte. Ltd. (collectively, the “RF360 Subsidiaries”).

RF360 Holdings Singapore Pte. Ltd. is a joint venture of Qualcomm Global Trading Pte. Ltd. and EPCOS AG.

RF360 Europe GmbH, Anzinger Str. 13, München, Germany

© 2018 RF360 Europe GmbH and/or its affiliated companies. All rights reserved.

These materials, including the information contained herein, may be used only for informational purposes by the customer. The RF360 Subsidiaries assume no responsibility for errors or omissions in these materials or the information contained herein. The RF360 Subsidiaries reserve the right to make changes to the product(s) or information contained herein without notice. The materials and information are provided on an AS IS basis, and the RF360 Subsidiaries assume no liability and make no warranty or representation, either expressed or implied, with respect to the materials, or any output or results based on the use, application, or evaluation of such materials, including, without limitation, with respect to the non-infringement of trademarks, patents, copyrights or any other intellectual property rights or other rights of third parties.

No use of this documentation or any information contained herein grants any license, whether express, implied, by estoppel or otherwise, to any intellectual property rights, including, without limitation, to any patents owned by QUALCOMM Incorporated or any of its subsidiaries.

Not to be used, copied, reproduced, or modified in whole or in part, nor its contents revealed in any manner to others without the express written permission of RF360 Europe GmbH.

Qualcomm and Qualcomm RF360 are trademarks of Qualcomm Incorporated, registered in the United States and other countries. RF360 is a trademark of Qualcomm Incorporated. Other product and brand names may be trademarks or registered trademarks of their respective owners.

This technical data may be subject to U.S. and international export, re-export, or transfer ("export") laws. Diversion contrary to U.S. and international law is strictly prohibited.

<b>SAW components</b>	<b>B4421</b>
<b>SAW duplexer</b>	<b>1747.5 / 1842.5 MHz</b>

Data sheet

**Table of contents**

1 <a href="#">Application</a> .....	4
2 <a href="#">Features</a> .....	4
3 <a href="#">Package</a> .....	5
4 <a href="#">Pin configuration</a> .....	5
5 <a href="#">Matching circuit</a> .....	6
6 <a href="#">Characteristics</a> .....	7
7 <a href="#">Maximum ratings</a> .....	10
8 <a href="#">Transmission coefficients</a> .....	11
9 <a href="#">Reflection coefficients</a> .....	14
10 <a href="#">Packing material</a> .....	15
11 <a href="#">Marking</a> .....	18
12 <a href="#">Soldering profile</a> .....	19
13 <a href="#">Annotations</a> .....	20
14 <a href="#">Cautions and warnings</a> .....	21
<a href="#">Important notes</a> .....	22


Data sheet

## 1 Application

- Low-loss SAW duplexer for band 3 systems
- Low insertion attenuation
- Low amplitude ripple
- High isolation between Tx and Rx

## 2 Features

- Package size 1.8±0.1 mm × 1.4±0.1 mm
- Package height 0.45 mm (max.)
- Approximate weight 4 mg
- RoHS compatible
- Package for Surface Mount Technology (SMT)
- Ni/Au-plated terminals
- Filter surface passivated
- Electrostatic Sensitive Device (ESD)
- Moisture Sensitivity Level 2a (MSL2a)
- AEC-Q200 qualified component family (Grade 3: -40 °C to +85 °C)

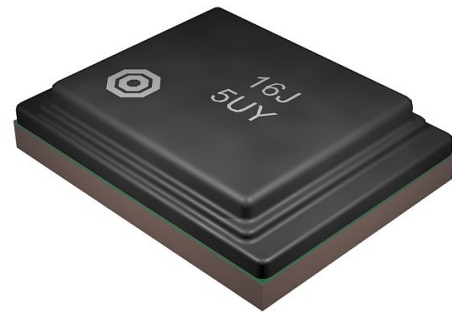

**Figure 1:** Picture of component with example of product marking.


**SAW components** **B4421**

**SAW duplexer** **1747.5 / 1842.5 MHz**

Data sheet

**3 Package**

BOTTOM VIEW

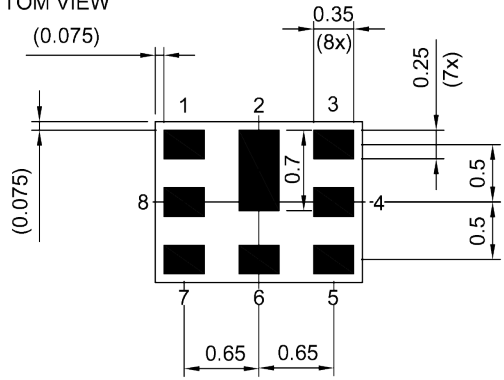


Pad and Pitch Tolerance ±0.05

SIDE VIEW




TOP VIEW

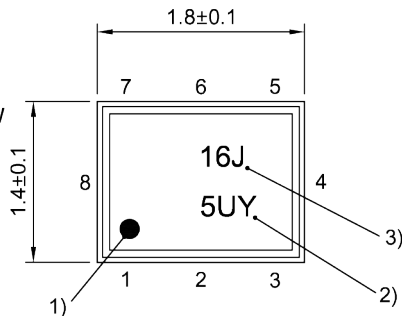

- 1) Marking for pad number 1
- 2) Example of encoded lot number
- 3) Example of encoded filter type number

Land pattern THRU VIEW

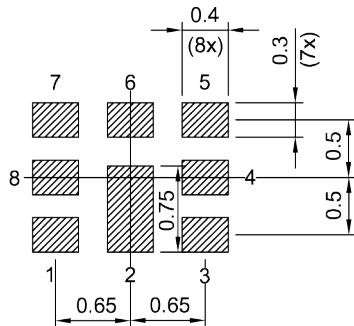

Landing pad tolerance -0.02

**Figure 2:** Drawing of package with package height A = 0.45 mm (max.). See Sec. Package information (p. 21).

**4 Pin configuration**


- 1        RX
- 3        TX
- 6        ANT
- 2, 4, 5, 7, 8    Ground

Data sheet

## 5 Matching circuit

■  $L_{p6} = 3.1 \text{ nH}$

■  $L_{s3} = 1.8 \text{ nH}$

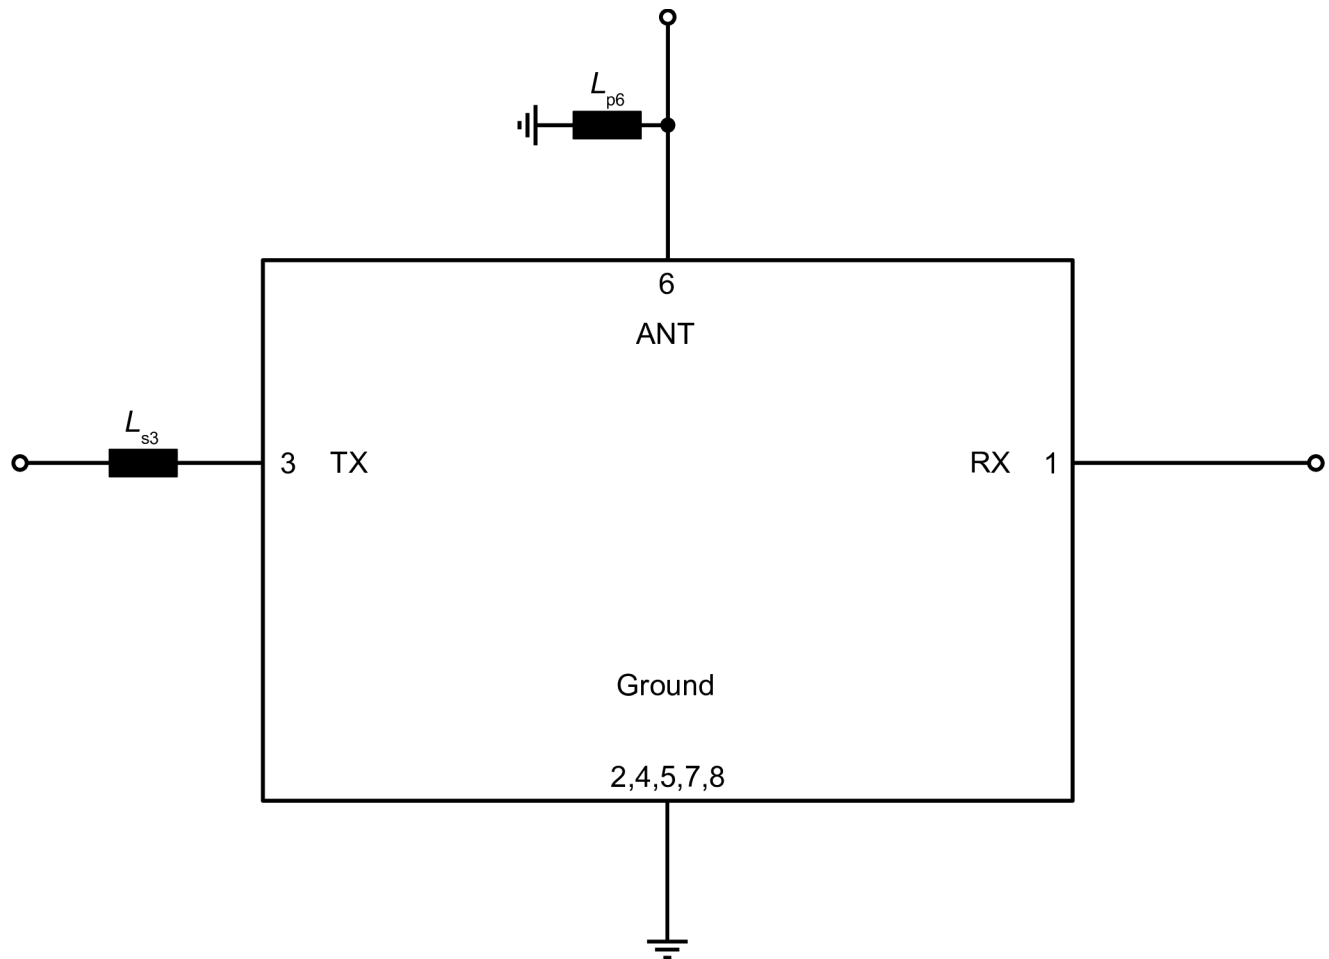

**Figure 3:** Schematic of matching circuit.



## SAW components

B4421

## SAW duplexer

1747.5 / 1842.5 MHz

Data sheet

## 6 Characteristics

## 6.1 TX – ANT

Temperature range for specification	$T_{SPEC}$	= -30 °C ... +85 °C
TX terminating impedance	$Z_{TX}$	= 50 $\Omega$ with ser. 1.8 nH <sup>1)</sup>
ANT terminating impedance	$Z_{ANT}$	= 50 $\Omega$ with par. 3.1 nH <sup>1)</sup>
RX terminating impedance	$Z_{RX}$	= 50 $\Omega$

Characteristics TX – ANT						min. for $T_{SPEC}$	typ. @ +25 °C	max. for $T_{SPEC}$		
<b>Center frequency</b>						$f_C$	—	1747.5	—	MHz
<b>Maximum insertion attenuation</b>										
	1710... 1785	MHz	$\alpha_{INT,max}^{2)}$	—	2.2	2.8 <sup>3)</sup>				
	1710... 1785	MHz	$\alpha_{INT,max}^{2)}$	—	2.2	3.2				
	1710.24... 1784.76	MHz	$\alpha_{max}$	—	2.4	4.4				
<b>Amplitude ripple (p-p)</b>						$\Delta\alpha_{INT}^{2)}$				
	1710... 1785	MHz		—	1.2	2.5				
<b>Maximum VSWR</b>						VSWR <sub>max</sub>				
@ TX port	1710.24... 1784.76	MHz		—	1.8	2.0				
@ ANT port	1710.24... 1784.76	MHz		—	1.7	2.0				
<b>Minimum attenuation</b>										
	100... 1565.42	MHz	$\alpha_{min}$	32	36	—				
	703... 756	MHz	$\alpha_{min}$	40	45	—				
	814... 915	MHz	$\alpha_{min}$	36	42	—				
	925... 960	MHz	$\alpha_{min}$	36	41	—				
	1559... 1605.886	MHz	$\alpha_{min}$	34	43	—				
	1605.886... 1680	MHz	$\alpha_{min}$	30	35	—				
	1805... 1880	MHz	$\alpha_{INT,min}^{2)}$	45 <sup>3)</sup>	49	—				
	1805... 1880	MHz	$\alpha_{INT,min}^{2)}$	42	49	—				
	1805.24... 1879.76	MHz	$\alpha_{min}$	35	48	—				
	1920... 1980	MHz	$\alpha_{min}$	30	38	—				
	2110... 2170	MHz	$\alpha_{min}$	35	41	—				
	2400... 2500	MHz	$\alpha_{min}$	35	40	—				
	2500... 2570	MHz	$\alpha_{min}$	35	41	—				
	2620... 2690	MHz	$\alpha_{min}$	35	38	—				
	3420... 3570	MHz	$\alpha_{min}$	25	32	—				
	4900... 6000	MHz	$\alpha_{min}$	15	25	—				

<sup>1)</sup> See Sec. Matching circuit (p. 6).

<sup>2)</sup> Integrated attenuation  $\alpha_{INT}$ : Averaged power  $|S_{ij}|^2$  over the center 4.5 MHz of LTE 5 MHz (25 RB) channels.

<sup>3)</sup> Valid for temperature  $T = -10$  °C...+55 °C.

## SAW components

B4421

## SAW duplexer

1747.5 / 1842.5 MHz

## Data sheet

## 6.2 ANT – RX

Temperature range for specification	$T_{SPEC}$	= -30 °C ... +85 °C
TX terminating impedance	$Z_{TX}$	= 50 $\Omega$ with ser. 1.8 nH <sup>1)</sup>
ANT terminating impedance	$Z_{ANT}$	= 50 $\Omega$ with par. 3.1 nH <sup>1)</sup>
RX terminating impedance	$Z_{RX}$	= 50 $\Omega$

Characteristics ANT – RX				min. for $T_{SPEC}$	typ. @ +25 °C	max. for $T_{SPEC}$	
<b>Center frequency</b>			$f_C$	—	1842.5	—	MHz
<b>Maximum insertion attenuation</b>							
	1805... 1880	MHz	$\alpha_{INT,max}^{2)}$	—	2.4	3.1 <sup>3)</sup>	dB
	1805... 1880	MHz	$\alpha_{INT,max}^{2)}$	—	2.4	3.5	dB
	1805.24... 1879.76	MHz	$\alpha_{max}$	—	2.6	4.8	dB
<b>Amplitude ripple (p-p)</b>			$\Delta\alpha_{INT}^{2)}$				
	1805... 1880	MHz		—	1.0	2.7	dB
<b>Maximum VSWR</b>			VSWR <sub>max</sub>				
@ ANT port	1805.24... 1879.76	MHz		—	1.7	2.1	
@ RX port	1805.24... 1879.76	MHz		—	1.7	2.1	
<b>Minimum attenuation</b>							
	95	MHz	$\alpha_{min}$	50	70	—	dB
	100... 1710	MHz	$\alpha_{min}$	40	46	—	dB
	1710... 1785	MHz	$\alpha_{INT,min}^{2)}$	45	54	—	dB
	1710.24... 1784.76	MHz	$\alpha_{min}$	40	51	—	dB
	1785... 1790	MHz	$\alpha_{min}$	10	38	—	dB
	1920... 1940	MHz	$\alpha_{min}$	28	38	—	dB
	1940... 2400	MHz	$\alpha_{min}$	35	44	—	dB
	2400... 2500	MHz	$\alpha_{min}$	40	45	—	dB
	2500... 2570	MHz	$\alpha_{min}$	40	44	—	dB
	2570... 3515	MHz	$\alpha_{min}$	35	44	—	dB
	3515... 3665	MHz	$\alpha_{min}$	35	47	—	dB
	3665... 3760	MHz	$\alpha_{min}$	35	46	—	dB
	3760... 6000	MHz	$\alpha_{min}$	30	39	—	dB

<sup>1)</sup> See Sec. Matching circuit (p. 6).

<sup>2)</sup> Integrated attenuation  $\alpha_{INT}$ : Averaged power  $|S_{ij}|^2$  over the center 4.5 MHz of LTE 5 MHz (25 RB) channels.

<sup>3)</sup> Valid for temperature  $T = -10$  °C...+55 °C.

**SAW components**

B4421

**SAW duplexer**

1747.5 / 1842.5 MHz

Data sheet

**6.3 TX – RX**

Temperature range for specification	$T_{SPEC}$	= -30 °C ... +85 °C
TX terminating impedance	$Z_{TX}$	= 50 $\Omega$ with ser. 1.8 nH <sup>1)</sup>
ANT terminating impedance	$Z_{ANT}$	= 50 $\Omega$ with par. 3.1 nH <sup>1)</sup>
RX terminating impedance	$Z_{RX}$	= 50 $\Omega$

Characteristics TX – RX				min. for $T_{SPEC}$	typ. @ +25 °C	max. for $T_{SPEC}$	
<b>Minimum isolation</b>							
	1710... 1785	MHz	$\alpha_{INT,min}^{2)}$	50	57	—	dB
	1710.24... 1784.76	MHz	$\alpha_{min}$	42	56	—	dB
	1805... 1880	MHz	$\alpha_{INT,min}^{2)}$	48	52	—	dB
	1805.24... 1879.76	MHz	$\alpha_{min}$	40	52	—	dB

<sup>1)</sup> See Sec. Matching circuit (p. 6).

<sup>2)</sup> Integrated attenuation  $\alpha_{INT}$ : Averaged power  $|S_{ij}|^2$  over the center 4.5 MHz of LTE 5 MHz (25 RB) channels.

## SAW components

B4421

## SAW duplexer

1747.5 / 1842.5 MHz

Data sheet

## 7 Maximum ratings

Operable temperature	$T_{OP} = -40\text{ °C} \dots +85\text{ °C}$	
Storage temperature	$T_{STG}^{1)} = -40\text{ °C} \dots +85\text{ °C}$	
DC voltage	$ V_{DC} ^{2)} = 0\text{ V}$	
Input power	$P_{IN}$	
@ TX port: 1710 ... 1785 MHz	28 dBm	Continuous wave for 5000 h @ 50 °C.
@ TX port: 1710 ... 1785 MHz	28 dBm	5 MHz LTE uplink signal (25 RB) for 5000 h @ 50 °C.

<sup>1)</sup> Not valid for packaging material. Storage temperature for packaging material is -25 °C to +40 °C.

<sup>2)</sup> In case of applied DC voltage blocking capacitors are mandatory.

SAW components	B4421
SAW duplexer	1747.5 / 1842.5 MHz

Data sheet

8 Transmission coefficients

8.1 TX – ANT


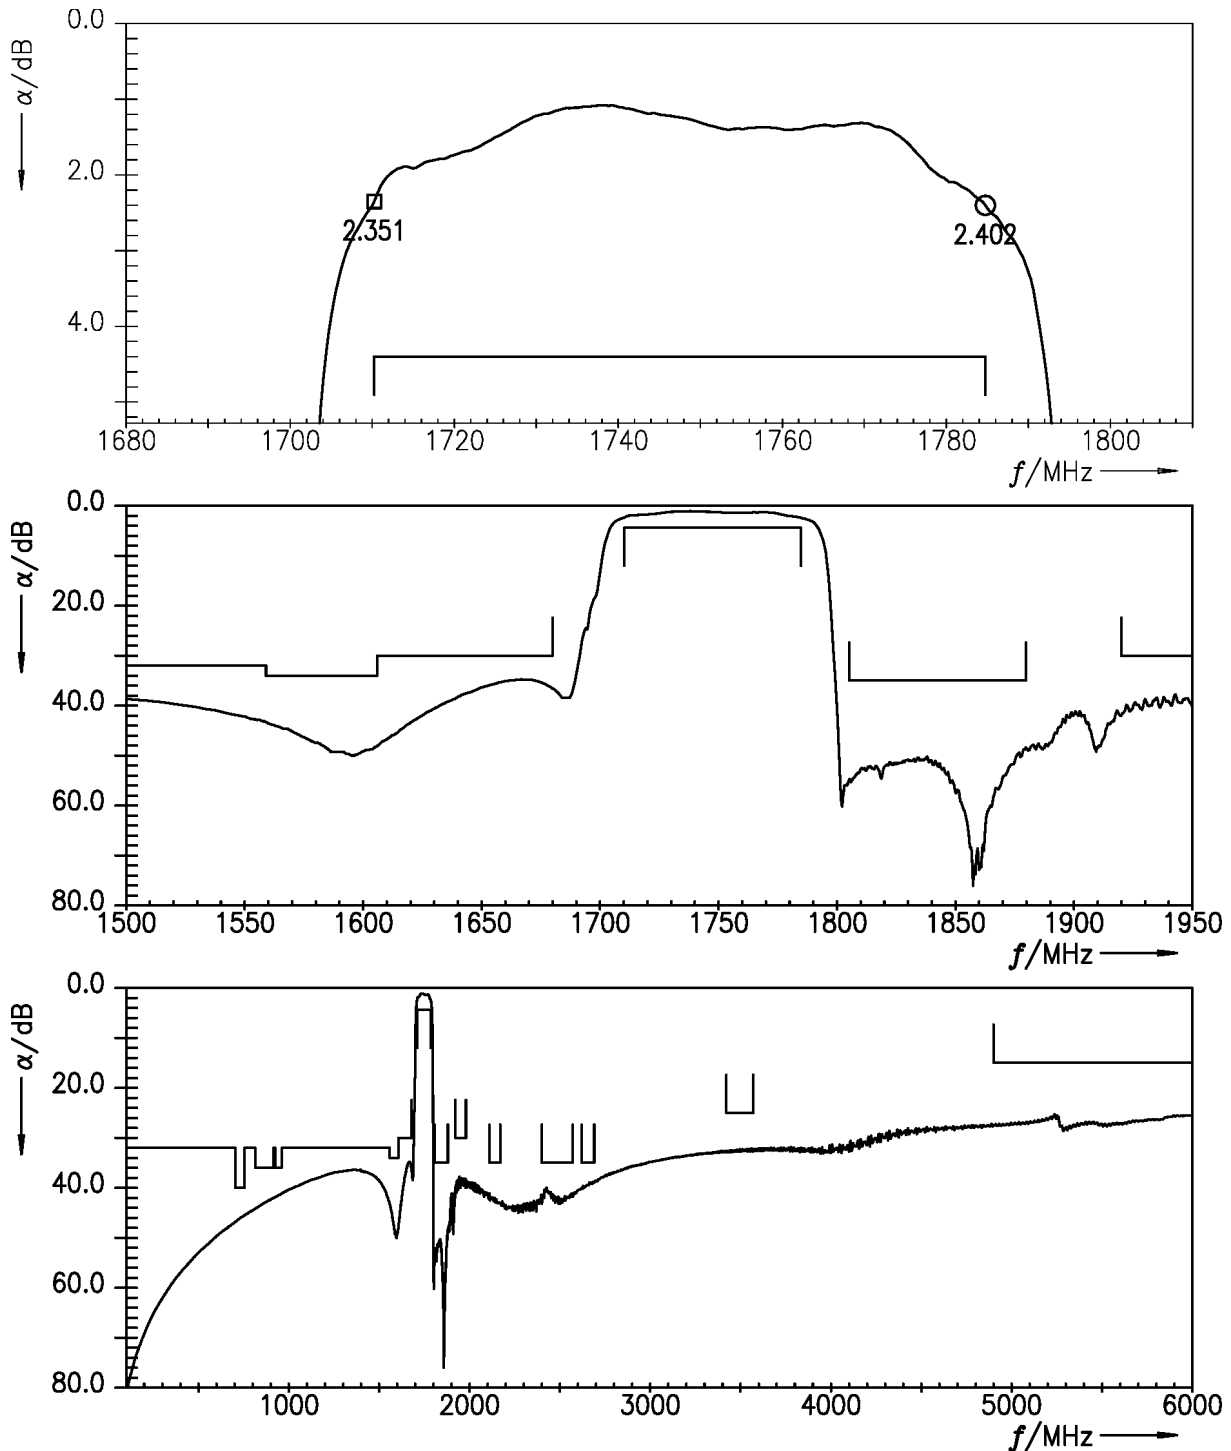


Figure 4: Attenuation TX – ANT.

<b>SAW components</b>	<b>B4421</b>
<b>SAW duplexer</b>	<b>1747.5 / 1842.5 MHz</b>

Data sheet

**8.2 ANT – RX**

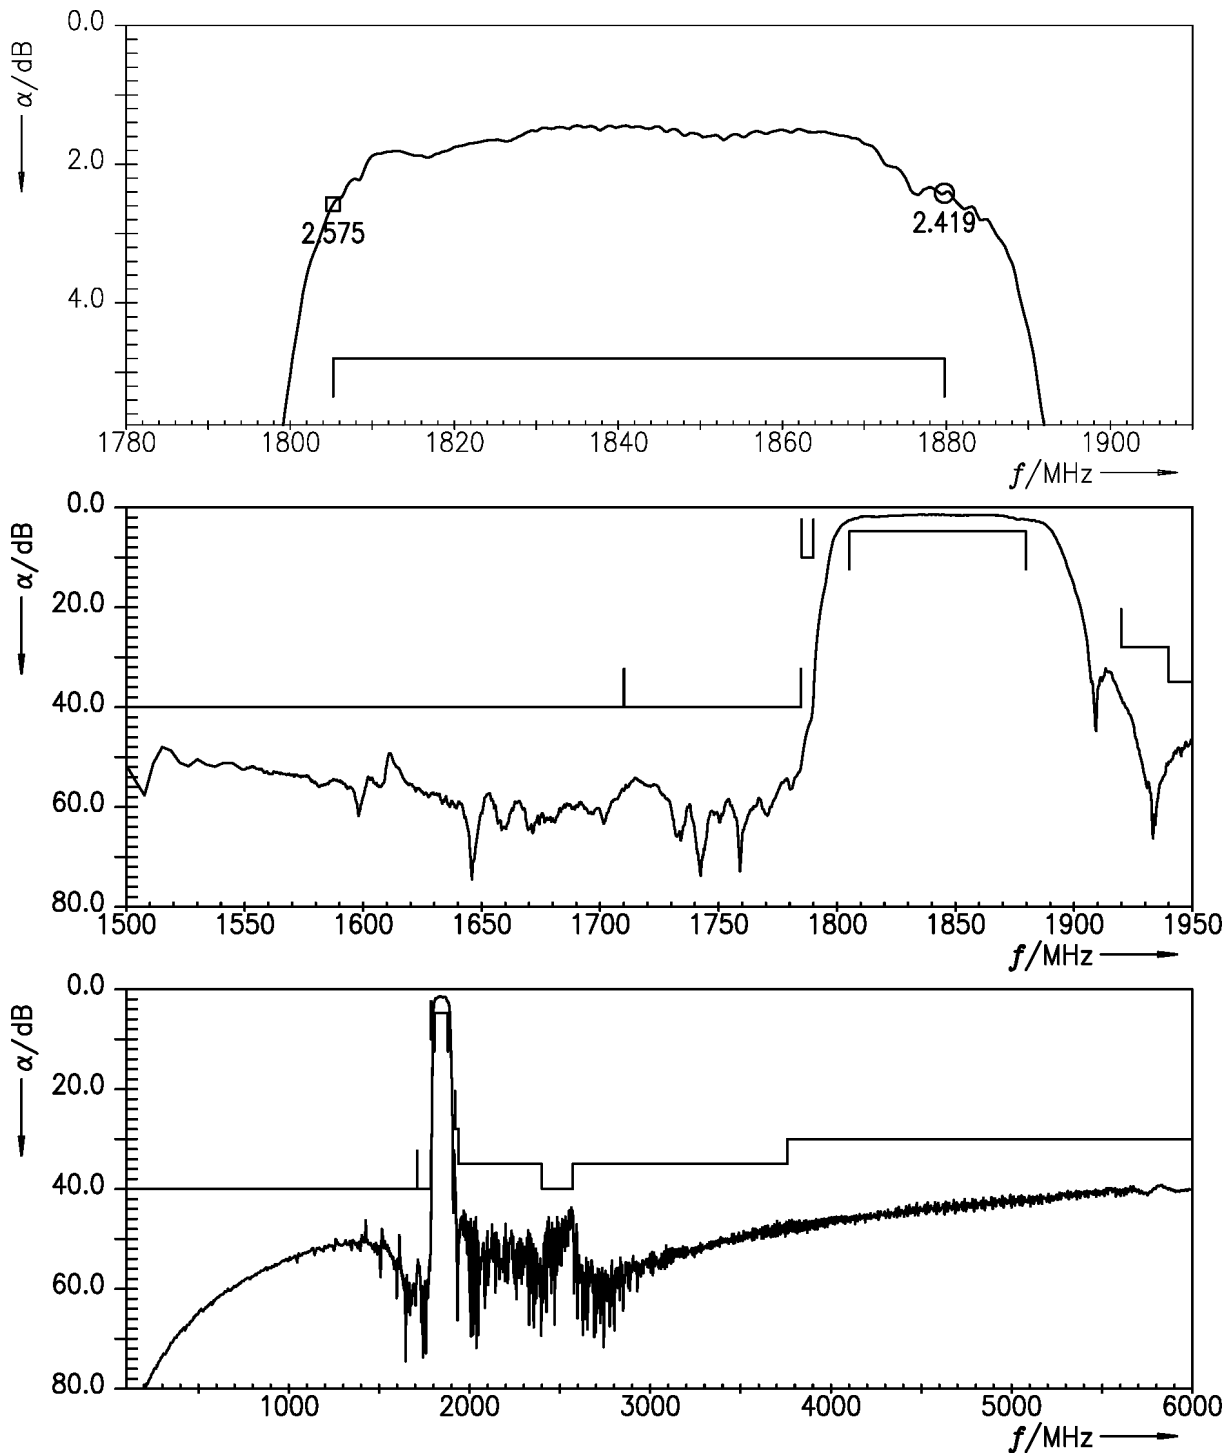

**Figure 5:** Attenuation ANT – RX.

<b>SAW components</b>	<b>B4421</b>
<b>SAW duplexer</b>	<b>1747.5 / 1842.5 MHz</b>

Data sheet

8.3 TX – RX


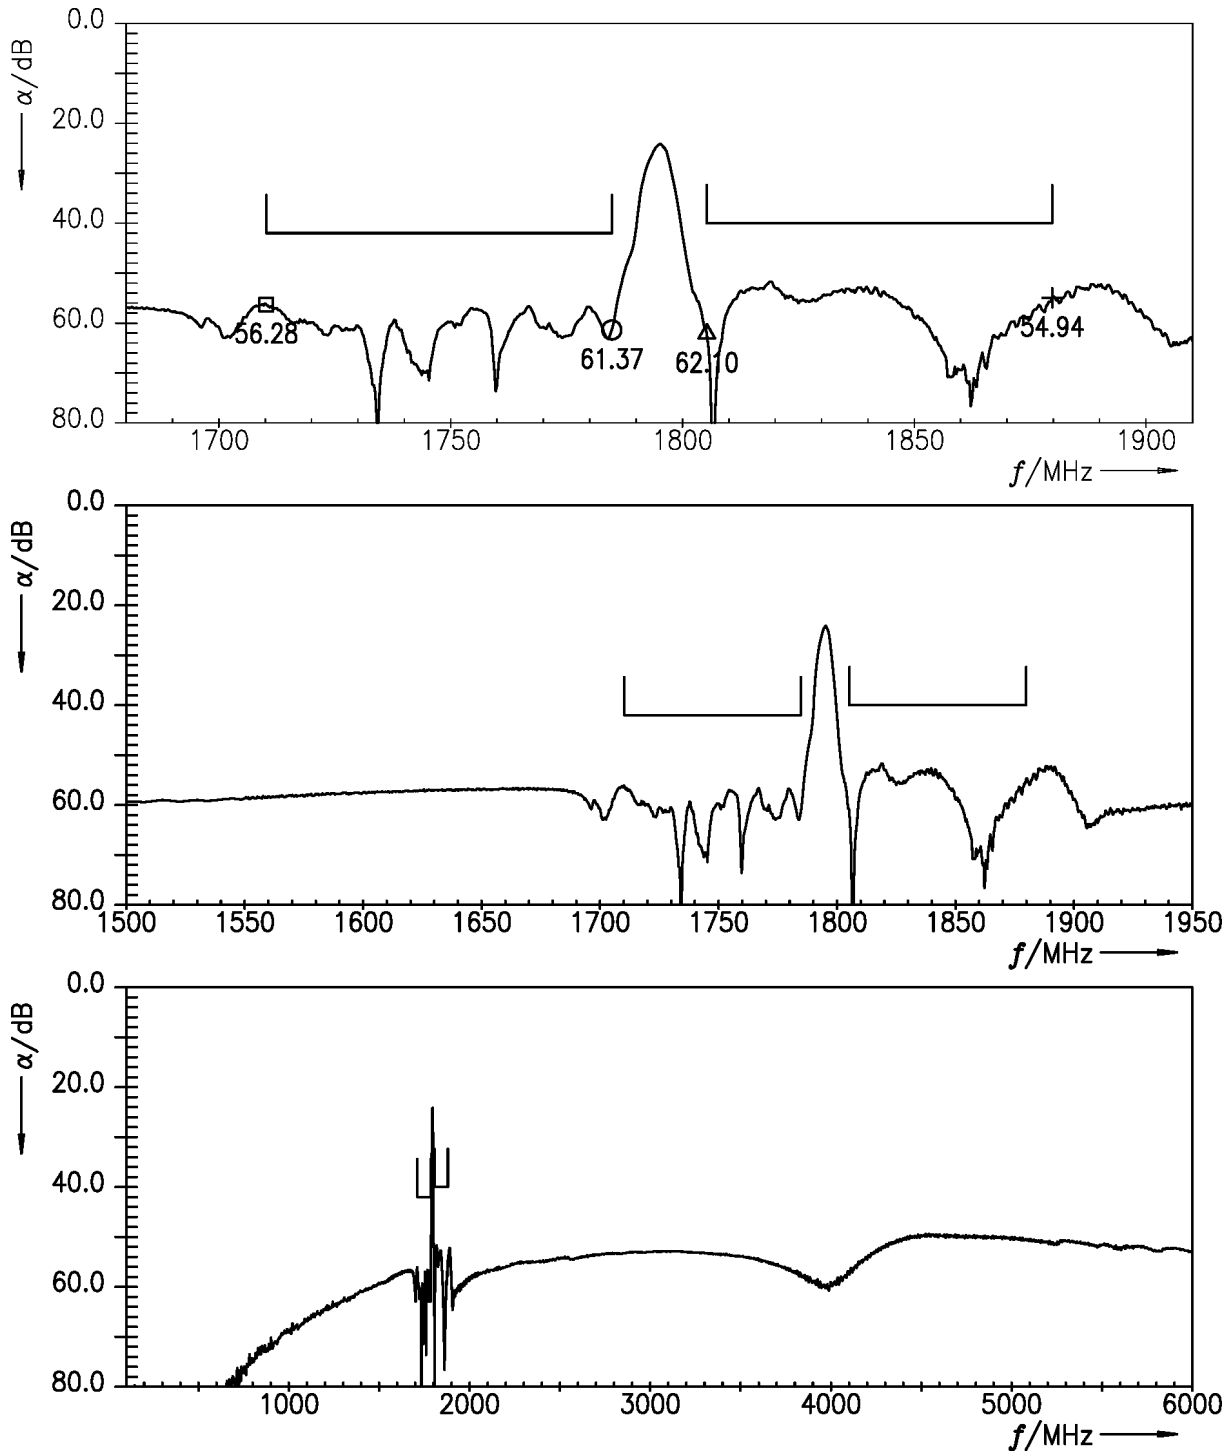



Figure 6: Isolation TX – RX.

Data sheet


**9 Reflection coefficients**

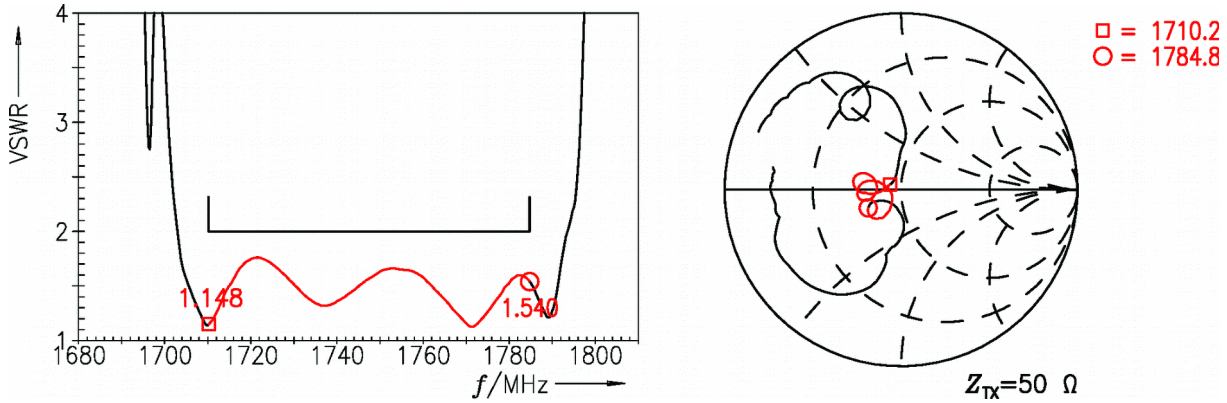

**Figure 7:** Reflection coefficient at TX port.

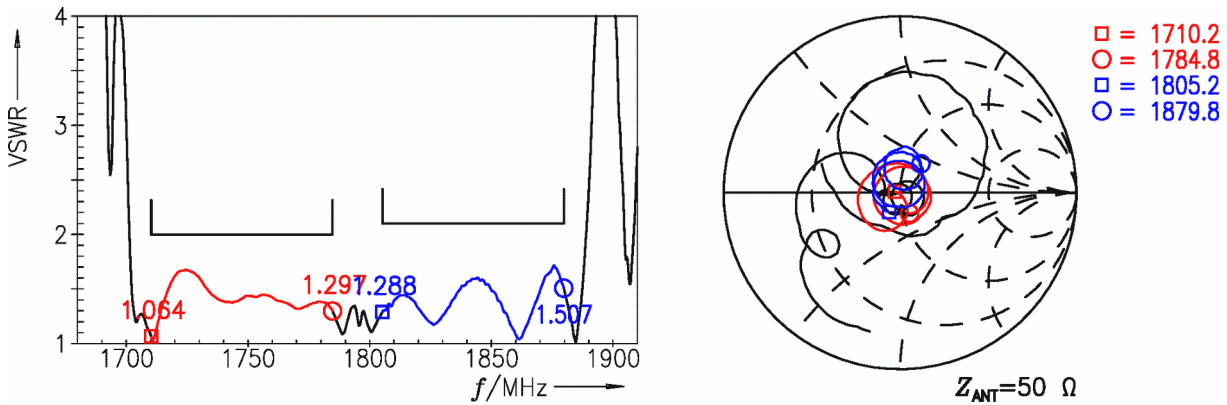

**Figure 8:** Reflection coefficient at ANT port.

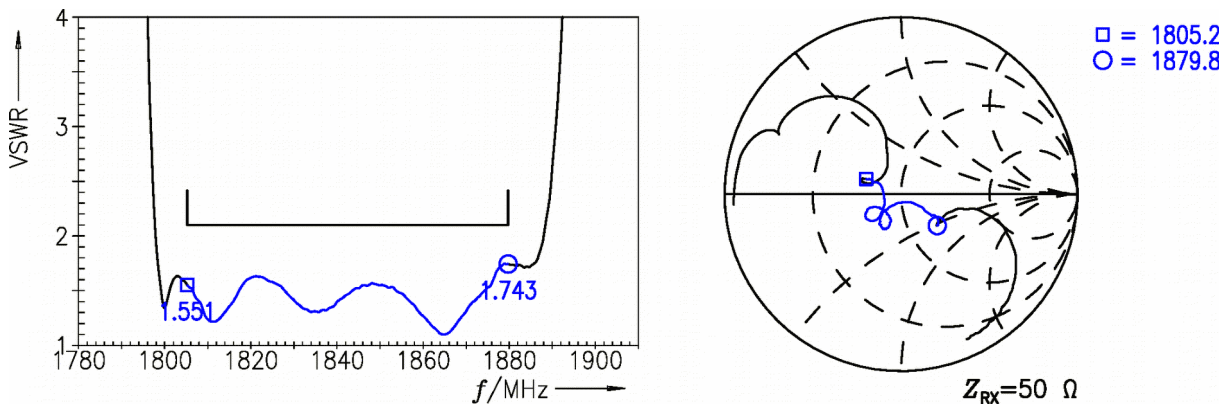


**Figure 9:** Reflection coefficient at RX port.



Data sheet

**10 Packing material**

**10.1 Tape**

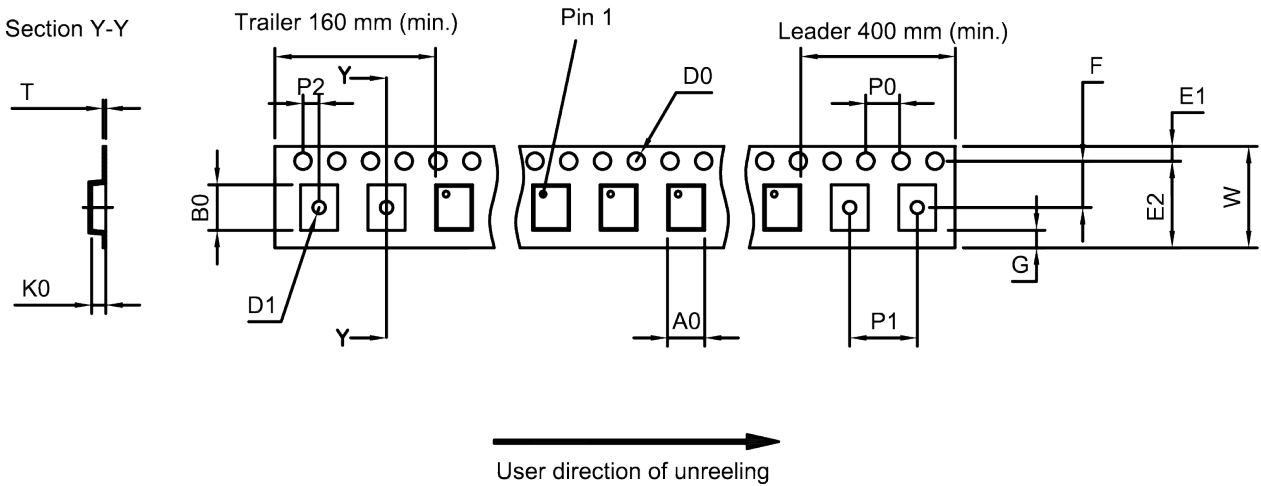

**Figure 10:** Drawing of tape (first-angle projection) with tape dimensions according to Table 1.

A <sub>0</sub>	1.62±0.05 mm	E <sub>2</sub>	6.25 mm (min.)	P <sub>1</sub>	4.0±0.1 mm
B <sub>0</sub>	2.04±0.05 mm	F	3.5±0.05 mm	P <sub>2</sub>	2.0±0.05 mm
D <sub>0</sub>	1.5+0.1/-0 mm	G	0.75 mm (min.)	T	0.25±0.05 mm
D <sub>1</sub>	0.8±0.05 mm	K <sub>0</sub>	0.62±0.05 mm	W	8.0±0.1 mm
E <sub>1</sub>	1.75±0.1 mm	P <sub>0</sub>	4.0±0.1 mm		

**Table 1:** Tape dimensions.

SAW components	B4421
SAW duplexer	1747.5 / 1842.5 MHz

Data sheet

10.2 Reel with diameter of 180 mm

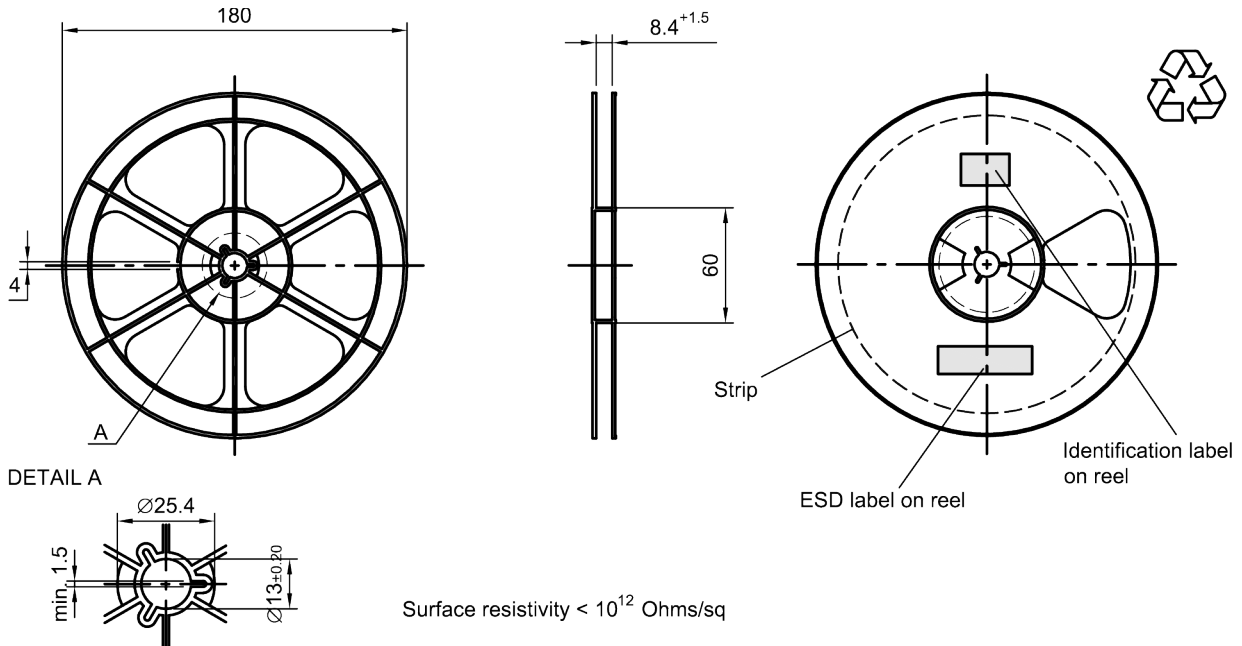


Figure 11: Drawing of reel (first-angle projection) with diameter of 180 mm.

Dimensions [mm]

X = 220+5

Y = 235+5

Sealing area 10±3

Printing on vacuumbag



Vacuumbag


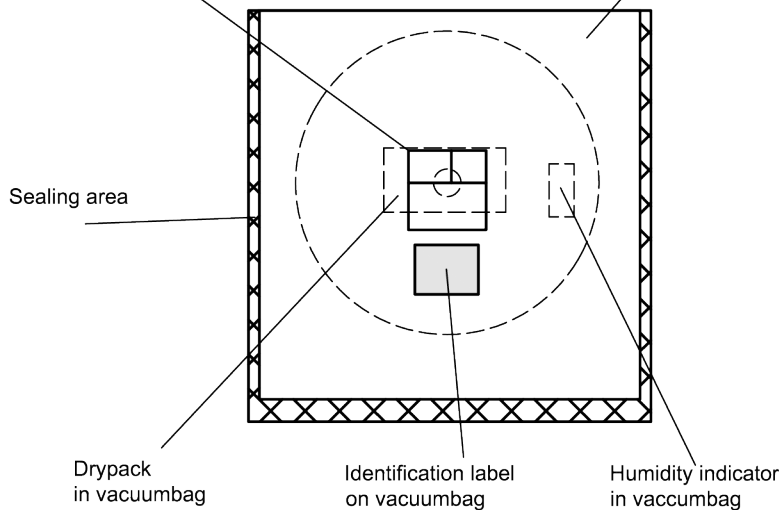


Figure 12: Drawing of moisture barrier bag (MBB) for reel with diameter of 180 mm.

<b>SAW components</b>	<b>B4421</b>
<b>SAW duplexer</b>	<b>1747.5 / 1842.5 MHz</b>

Data sheet

Dimensions [mm]  
 L = 188  
 B = 188  
 H = 30  
 Tolerance ±5

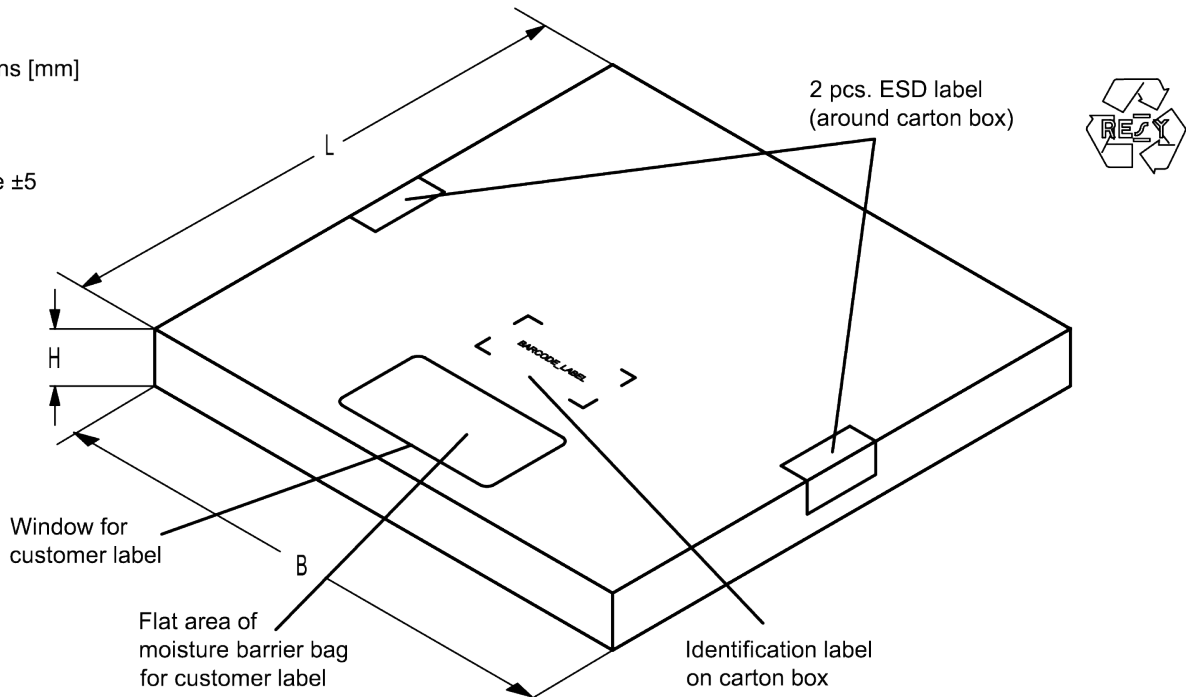

**Figure 13:** Drawing of folding box for reel with diameter of 180 mm.

## SAW components

B4421

## SAW duplexer

1747.5 / 1842.5 MHz

Data sheet

## 11 Marking

Products are marked with product type number and lot number encoded according to Table 2:

## ■ Type number:

The 4 digit type number of the ordering code, e.g., B3xxxxB**1234**xxxx,  
is encoded by a special BASE32 code into a 3 digit marking.

Example of decoding	type number marking on device	in decimal code.
	<b>16J</b>	<b>1234</b>
	$1 \times 32^2 + 6 \times 32^1 + 18 (=J) \times 32^0$	<b>1234</b>

The BASE32 code for product type B4421 is 4A5.

## ■ Lot number:

The last 5 digits of the lot number, e.g., **12345**,  
are encoded based on a special BASE47 code into a 3 digit marking.

Example of decoding lot number marking on device		in decimal code.
	<b>5UY</b>	<b>12345</b>
	$5 \times 47^2 + 27 (=U) \times 47^1 + 31 (=Y) \times 47^0$	<b>12345</b>

Adopted BASE32 code for type number			
Decimal value	Base32 code	Decimal value	Base32 code
0	0	16	G
1	1	17	H
2	2	18	J
3	3	19	K
4	4	20	M
5	5	21	N
6	6	22	P
7	7	23	Q
8	8	24	R
9	9	25	S
10	A	26	T
11	B	27	V
12	C	28	W
13	D	29	X
14	E	30	Y
15	F	31	Z

Adopted BASE47 code for lot number			
Decimal value	Base47 code	Decimal value	Base47 code
0	0	24	R
1	1	25	S
2	2	26	T
3	3	27	U
4	4	28	V
5	5	29	W
6	6	30	X
7	7	31	Y
8	8	32	Z
9	9	33	b
10	A	34	d
11	B	35	f
12	C	36	h
13	D	37	n
14	E	38	r
15	F	39	t
16	G	40	v
17	H	41	\
18	J	42	?
19	K	43	{
20	L	44	}
21	M	45	<
22	N	46	>
23	P		

**Table 2:** Lists for encoding and decoding of marking.


Data sheet

## 12 Soldering profile

The recommended soldering process is in accordance with IEC 60068-2-58 – 3<sup>rd</sup> edit and IPC/JEDEC J-STD-020B.

ramp rate	≤ 3 K/s
preheat	125 °C to 220 °C, 150 s to 210 s, 0.4 K/s to 1.0 K/s
$T > 220$ °C	30 s to 70 s
$T > 230$ °C	min. 10 s
$T > 245$ °C	max. 20 s
$T \geq 255$ °C	–
peak temperature $T_{\text{peak}}$	250 °C +0/-5 °C
wetting temperature $T_{\text{min}}$	230 °C +5/-0 °C for 10 s ± 1 s
cooling rate	≤ 3 K/s
soldering temperature $T$	measured at solder pads

**Table 3:** Characteristics of recommended soldering profile for lead-free solder (Sn95.5Ag3.8Cu0.7).

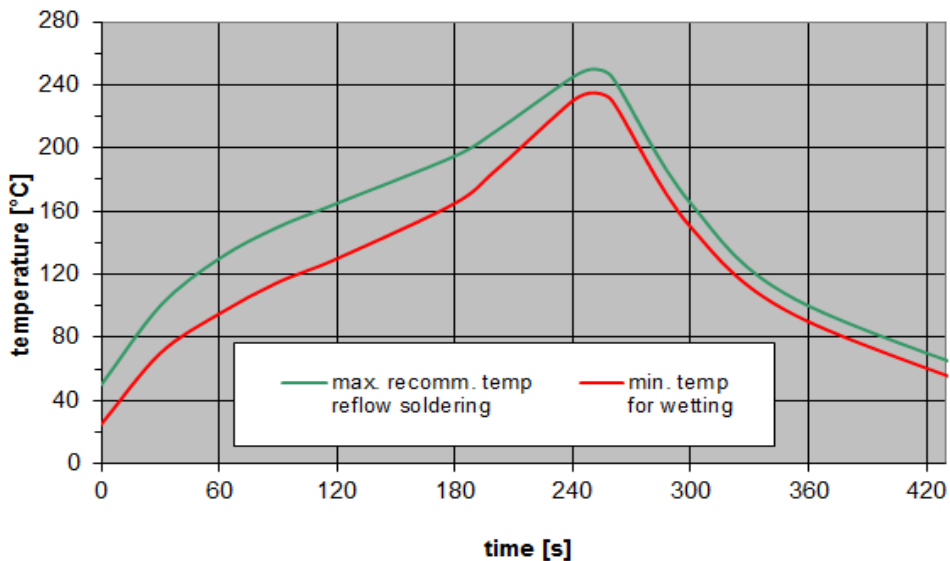

**Figure 14:** Recommended reflow profile for convection and infrared soldering – lead-free solder.

<b>SAW components</b>	<b>B4421</b>
<b>SAW duplexer</b>	<b>1747.5 / 1842.5 MHz</b>

Data sheet

### 13 Annotations

#### 13.1 Matching coils

See TDK inductor pdf-catalog <http://www.tdk.co.jp/tefe02/coil.htm#aname1> and Data Library for circuit simulation <http://www.tdk.co.jp/etvcl/index.htm>.

#### 13.2 RoHS compatibility

ROHS-compatible means that products are compatible with the requirements according to Art. 4 (substance restrictions) of Directive 2011/65/EU of the European Parliament and of the Council of June 8th, 2011, on the restriction of the use of certain hazardous substances in electrical and electronic equipment ("Directive") with due regard to the application of exemptions as per Annex III of the Directive in certain cases.

#### 13.3 Scattering parameters (S-parameters)

The pin/port assignment is available in the headers of the S-parameter files. Please contact your local RF360 sales office.

Data sheet

## **14 Cautions and warnings**

### **14.1 Display of ordering codes for RF360 products**

The ordering code for one and the same product can be represented differently in data sheets, data books, other publications and the website of RF360, or in order-related documents such as shipping notes, order confirmations and product labels. The varying representations of the ordering codes are due to different processes employed and do not affect the specifications of the respective products. Detailed information can be found on the Internet under [www.rf360jv.com/orderingcodes](http://www.rf360jv.com/orderingcodes).

### **14.2 Material information**

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.

For information on recycling of tapes and reels please contact one of our sales offices.

### **14.3 Moldability**

Before using in overmolding environment, please contact your local RF360 sales office.

### **14.4 Package information**

#### **Landing area**

The printed circuit board (PCB) land pattern (landing area) shown is based on RF360 internal development and empirical data and illustrated for example purposes, only. As customers' SMD assembly processes may have a plenty of variants and influence factors which are not under control or knowledge of RF360, additional careful process development on customer side is necessary and strongly recommended in order to achieve best soldering results tailored to the particular customer needs.

#### **Dimensions**

Unless otherwise specified all dimensions are understood using unit millimeter (mm).

Dimensions do not include burrs.

#### **Projection method**

Unless otherwise specified first-angle projection is applied.

## Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, RF360 Europe GmbH and its affiliates are either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an RF360 product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet ([www.rf360jv.com/material](http://www.rf360jv.com/material)). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available.  
The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.